

Composite Impact Wrench

Professional



EP-0981T 3/8"
Twin Hammer



EP-0983T 3/8"
Twin Hammer



EP-0982T 1/2"
Mini Twin Hammer



EP-0984T 1/2"
Mini Twin Hammer



EP-1281P 1/2"
New Pin Clutch



EP-1281T 1/2"
Twin Hammer



EP-1282T 1/2"
Twin Hammer



EP-1930T 3/4"
Mini Twin Hammer



EP-1932T 3/4"
Mini Twin Hammer



EP-1982T 3/4"
Twin Hammer



EP-2581T 1"
Twin Hammer



EP-2583T6 1"
Twin Hammer



EP-PW1281T 1/2"
Twin Hammer



EP-PW1283T 1/2"
Twin Hammer



EP-PW1283T-A 1/2"
Twin Hammer



EP-PW1284T 1/2"
Twin Hammer



EP-PW1284T-A 1/2"
Twin Hammer



EP-PW1982T 3/4"
Twin Hammer

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907

Fax: +886-4-25155908

E-mail: sales@europac.com.tw

<http://www.europac.com.tw>

Composite Impact Wrench (One Hand Operation)

High Power - Light Weight - Low air consumption



EP-0985T

STUBBY !



Reverse / Forward Control



One hand switching for 3 speeds forward power and always use maximum output power for reverse.



Extrusion edging strip of motor housing protection and decoration

Energy Saving

Lower air consumption

Ergonomic

One hand push button forward/reverse mechanism

High Power

450 FT-LB (610N-M)
efficient power level

Stubby

122mm length
compact design

Light Weight

1.3 kgs
composite design

One Hand Operation

Composite PREMIUM INDUSTRIAL Impact Wrench (Twin Hammer)



EP-0985T 1/2"
(Twin Hammer)



EP-0987T 1/2"
(Twin Hammer)



EP-1285T 1/2"
(Twin Hammer)



EP-1285TH 1/2"
(Twin Hammer)



EP-1985T 3/4"
(Twin Hammer)

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907

Fax: +886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw

PATENTED DESIGN OF NEW PIN CLUTCH

New improvement Hammer cam protects spring against damage from hammer pin.



Shorter and special design of hammer pin increased tools lifetime.

Special material with strict quality control of spring with 1000000 times endurance test, safety and durability!

Smooth balance impact for operation.

● Pin Clutch Hammer Mechanism



Mechanism :

- Smooth balance impact for operation.
- Provided with high torque and durability.
- Low vibration and noise.
- Smooth bolt starting, excellent for use in industry assembly line applications.

Usable for Products on Impact Clutch :

1/2", 3/4"

● Pin Less Hammer Mechanism



Mechanism :

- Closet hammer cage mechanism prevents breakage from hammer pin damage.
- Special extension design of hammer cam provides smooth balance impact, low vibration level and high torque level.
- Undivided hammer pin and hammer dog mechanism prevent damage of hammer pin, increased tools lifetime.
- Simple mechanism easy for tools maintenance.

Usable for Products on Impact Clutch :

1"

● Twin Hammer Hammer Mechanism



Mechanism :

- Two identical hammers provided with instantaneous balance blow and highest torque for blow starting.
- Durable hammer design and excellent for use in heavy-duty industrial applications.
- Simple mechanism easy for tools maintenance.

Usable for Products on Impact Clutch :

1/4", 3/8", 1/2", 3/4", 1"

● Rocking Dog Hammer Mechanism



Mechanism :

- Simple design hammer mechanism provided great hitting power, easy maintenance.
- Simple design recommended for medium duty industrial applications.

Usable for Products on Impact Clutch :

1/4", 3/8", 3/4", 1"

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel:+886-4-25155907

Fax:+886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw



- ▲ High strength aluminum alloy with undivided unit of high performance motor system delivers highest torque and durability.
- ▲ PATENTED design Composite and aluminum components provide with lightweight, durability, cold-resistant and pleasing to the eye.
- ▲ Alloy Steel anvil with special heat treatment for high durability.
- ▲ Alloy Steel twin hammer clutch system for smooth operation and durability.
- ▲ Teasing trigger provides great control and operator comfort.
- ▲ Handle Exhaust directs the air away from operator and work piece.



- ▲ Integrated power regulator with easy control dial with 3 speed of Forward and 2 speed of Reversed operation.
- ▲ Contoured elastomer handle grip for improved comfort and ergonomics.

Work Longer with less weight fatigue!
Get Into tight areas with high power performance!

1/2" Impact

INNOVATION



► Max Torque : 320 Ft.lb.
► Net Weight : 2.3 kgs



► Max Torque : 400 Ft.lb.
► Net Weight : 2.6 kgs



EP-1281T

► Max Torque : 1000 Ft.lb.
► Net Weight : 2.02 kgs

New

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907

Fax: +886-4-25155908

E-mail: sales@europac.com.tw


<http://www.europac.com.tw>

Light Weight 8 KGS
High Torque 2000 FT-LB

EP-2583T6

Professional 1" Composite Impact Wrench

- Work longer with less weight fatigue !
- Get into tight areas with high power performance !
- Super heavy duty for all automotive service, body shop, farm, track work etc.....

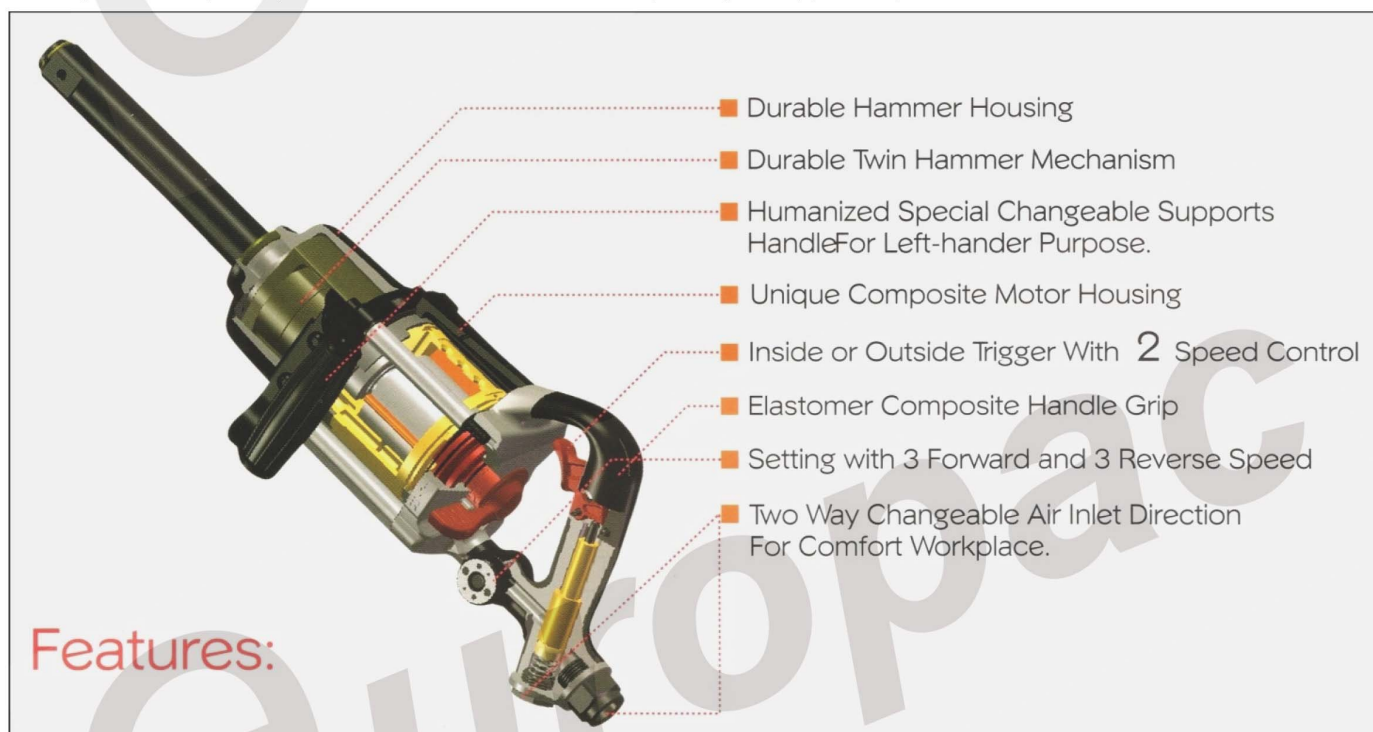

Forward: 3 Speeds
Reverse: 3 Speeds



Inside or Outside Trigger
with 2 Speed Control



Changeable Air Inlet
Direction



For Right-Hander
and Left-Hander



Air Exhaust

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907 Fax: +886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw

1/2" Composite Impact Wrench (One Hand Operation)

Low air consumption, short and small length for easy to get into narrow space



EP-0985T

Sutbby 1/2" Twin Hammer

*One hand switching for 3 speeds forward power and always use maximum output power for reverse.

*One hand push button forward/reverse mechanism

*Handle Exhaust

*Forward: 3 speed

Reverse: 1 speed

Model	EP-0985T
Square Drive	1/2"
Bolt Capacity	13 mm
Max Torque	450FT-LB (62KG-M, 610N-M)
Free Speed	9000 RPM
Air Consumption	4.2 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	122 mm
Net Weight	1.3 kg
Air Hose	10 mm
Packing	10pcs/CTN, 13 kgs / 14 kgs



EP-0985TK

14 pcs set 1/2" Impact Wrench Kit



EP-0985TK2

17 pcs set 1/2" Impact Wrench Kit

EP-0985TK	
1 pce	EP-0985T
9 pcs	Mini Socket (CR-V) 13,14,15,16,17,18,19,21,24 mm
1 pce	75mm Extension Bar
1 pce	Oil Pot
1 pce	Nipple
1 pce	Plastic Case
Packing	5 set/CTN, 13.5 kgs / 14.5 kgs

EP-0985TK2	
1 pce	EP-0985T
9 pcs	Mini Socket (CR-V) 13,14,15,16,17,18,19,21,24 mm
3 pcs	Thin Wall Impact Socket 17,19,21 mm (with Plastic Sleeve)
1 pce	75mm Extension Bar
1 pce	Oil Pot
1 pce	Nipple
1 pce	Plastic Case
Packing	5 set/CTN, 17 kgs / 18 kgs

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel:+886-4-25155907 Fax:+886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw

1/2" Composite Impact Wrench (One Hand Operation)

Low air consumption, short and small length for easy to get into narrow space



EP-0987T

Sutbby 1/2" Twin Hammer

*One hand switching for 3 speeds forward power and always use maximum output power for reverse.

*One hand push button forward/reverse mechanism

*Handle Exhaust

*Forward: 3 speed

Reverse: 1 speed

Model	EP-0987T
Square Drive	1/2"
Bolt Capacity	16 mm
Max Torque	550FT-LB (76KG-M, 746N-M)
Free Speed	7000 RPM
Air Consumption	4.37 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	148 mm
Net Weight	1.6 kg
Air Hose	10 mm
Packing	10pcs/CTN, 16 kgs / 17 kgs



EP-0987TK

14 pcs set 1/2" Impact Wrench Kit



EP-0987TK2

17 pcs set 1/2" Impact Wrench Kit

EP-0987TK	
1 pce	EP-0987T
9 pcs	Mini Socket (CR-V) 13,14,15,16,17,18,19,21,24 mm
1 pce	75mm Extension Bar
1 pce	Oil Pot
1 pce	Nipple
1 pce	Plastic Case
Packing	5 set/CTN, 15 kgs / 16 kgs

EP-0987TK2	
1 pce	EP-0987T
9 pcs	Mini Socket (CR-V) 13,14,15,16,17,18,19,21,24 mm
3 pcs	Thin Wall Impact Socket 17,19,21 mm (with Plastic Sleeve)
1 pce	75mm Extension Bar
1 pce	Oil Pot
1 pce	Nipple
1 pce	Plastic Case
Packing	5 set/CTN, 18.5 kgs / 19.5 kgs

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel:+886-4-25155907 Fax:+886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw

1/2" Composite Impact Wrench (One Hand Operation)

Low air consumption, short and small length for easy to get into narrow space



EP-1285T

1/2" Twin Hammer

*One hand switching for 3 speeds forward power and always use maximum output power for reverse.

*One hand push button forward/reverse mechanism

Model	EP-1285T
Square Drive	1/2"
Bolt Capacity	16 mm
Max Torque	900FT-LB (125KG-M, 1220N-M)
Free Speed	6500 RPM
Air Consumption	4.8 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	165 mm
Net Weight	2.02 kg
Air Hose	10 mm
Packing	10pcs/CTN, 20.2 kgs / 21.2 kgs

*Handle Exhaust

*Forward: 3 speed

Reverse: 1 speed



EP-1285TK

17 pcs set 1/2" Impact Wrench Kit



EP-1285TK2

12 pcs set 1/2" Impact Wrench Kit

EP-1285TK		EP-1285TK2	
1 pce	EP-1285T	1 pce	EP-1285T
10 pcs	Air Socket (Chrome-Molybdenum) 9, 10, 11, 13, 14, 17, 19, 22, 24, 27 mm	6 pcs	Air Deep Socket (Chrome-Molybdenum) 17, 19, 21 mm (with Plastic Sleeve) 22, 23, 24 mm
1 pce	5" Extension Bar		
1 pce	Oil Pot	1 pce	Oil Pot
1 pce	4 mm Hex Wrench	1 pce	4 mm Hex Wrench
1 pce	Nipple	1 pce	Nipple
1 pce	Mini Oiler	1 pce	Mini Oiler
1 pce	Plastic Case	1 pce	Plastic Case
Packing	5 set/CTN, 20.2 kgs / 21.2 kgs	Packing	5 set/CTN, 21.5 kgs / 22.5 kgs

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907 Fax: +886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw

1/2" Composite Impact Wrench (One Hand Operation)

Low air consumption, short and small length for easy to get into narrow space



EP-1285TH

Heavy Duty 1/2" Twin Hammer

- *One hand switching for 3 speeds forward power and always use maximum output power for reverse.
- *One hand push button forward/reverse mechanism

- *Handle Exhaust
- *Forward: 3 speed
- Reverse: 1 speed

Model	EP-1285TH
Square Drive	1/2"
Bolt Capacity	16 mm
Max Torque	1100FT-LB (152KG-M, 1492N-M)
Free Speed	5000 RPM
Air Consumption	4.9 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	186 mm
Net Weight	2.4 kg
Air Hose	10 mm
Packing	10pcs/CTN, 20.2 kgs / 21.2 kgs



EP-1285THK
17 pcs set 1/2" Impact Wrench Kit



EP-1285THK2
12 pcs set 1/2" Impact Wrench Kit

EP-1285THK	
1 pce	EP-1285TH
10 pcs	Air Socket (Chrome-Molybdenum) 9, 10, 11, 13, 14, 17, 19, 22, 24, 27 mm
1 pce	5" Extension Bar
1 pce	Oil Pot
1 pce	4 mm Hex Wrench
1 pce	Nipple
1 pce	Mini Oiler
1 pce	Plastic Case
Packing	5 set/CTN, 22.2 kgs / 23.2 kgs

EP-1285THK2	
1 pce	EP-1285TH
6 pcs	Air Deep Socket (Chrome-Molybdenum) 17, 19, 21 mm (with Plastic Sleeve) 22, 23, 24 mm
1 pce	Oil Pot
1 pce	4 mm Hex Wrench
1 pce	Nipple
1 pce	Mini Oiler
1 pce	Plastic Case
Packing	5 set/CTN, 23.5 kgs / 24.5 kgs

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907 Fax: +886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw

3/4" Composite Impact Wrench (One Hand Operation)

Low air consumption, short and small length for easy to get into narrow space



EP-1985T

Light Weight 3/4" Twin Hammer

*One hand switching for 3 speeds forward power and always use maximum output power for reverse.

*One hand push button forward/reverse mechanism

*Handle Exhaust

*Forward: 3 speed
Reverse: 1 speed

Model	EP-1985T
Square Drive	3/4"
Bolt Capacity	26 mm
Max Torque	1100FT-LB (152KG-M, 1492N-M)
Free Speed	5000 RPM
Air Consumption	4.9 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	191 mm
Net Weight	2.6 kg
Air Hose	10 mm
Packing	10pcs/CTN, 26 kgs / 27 kgs

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907 Fax: +886-4-25155908

E-mail: sales@europac.com.tw <http://www.europac.com.tw>

3/8" & 1/2" Mini Composite Impact Wrench

Light weight and high torque, excellent for use in industrial applications



EP-0981T

3/8" Twin Hammer

- * Handle Exhaust
- * Forward: 3 speed
- Reverse: 3 speed



EP-0983T

3/8" Twin Hammer

Model	EP-0981T
Square Drive	3/8"
Bolt Capacity	1/2" (13 mm)
Max Torque	280FT-LB (39KG-M, 380N-M)
Free Speed	10000 RPM
Air Consumption	3.7 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	170 mm
Net Weight	1.2 kg
Air Hose	10 mm
Packing	10pcs/CTN, 12 kgs / 13 kgs

Model	EP-0983T
Square Drive	3/8"
Bolt Capacity	1/2" (13 mm)
Max Torque	330FT-LB (46KG-M, 450N-M)
Free Speed	10000 RPM
Air Consumption	5 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	170 mm
Net Weight	1.3 kg
Air Hose	10 mm
Packing	10pcs/CTN, 13 kgs / 14 kgs



EP-0982T

1/2" Mini Twin Hammer

- * Handle Exhaust
- * Forward: 3 speed
- Reverse: 3 speed



EP-0984T

1/2" Mini Twin Hammer

Model	EP-0982T
Square Drive	1/2"
Bolt Capacity	1/2" (13 mm)
Max Torque	320FT-LB (44KG-M, 434N-M)
Free Speed	10000 RPM
Air Consumption	3.7 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	170 mm
Net Weight	1.2 kg
Air Hose	10 mm
Packing	10pcs/CTN, 12 kgs / 13 kgs

Model	EP-0984T
Square Drive	1/2"
Bolt Capacity	5/8" (16 mm)
Max Torque	420FT-LB (58KG-M, 570N-M)
Free Speed	10000 RPM
Air Consumption	5 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	170 mm
Net Weight	1.4 kg
Air Hose	10 mm
Packing	10pcs/CTN, 14 kgs / 15 kgs

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907 Fax: +886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw

3/8" & 1/2" Mini Composite Impact Wrench

Light weight and high torque, excellent for use in industrial applications

EP-0981TK

EP-0983TK

19 pcs set 3/8" Composite Impact Wrench Kit

1 pce	EP-0981T or EP-0983T
10 pcs	Air Socket (Chrome-Molybdenum) 8,10,11,12,13,14,16,17,19,21 mm
4 pce	Deep Air Socket 8,10,12,14 mm
1 pce	75mm Extension Bar
1 pce	4 mm Hex Wrench
1 pce	Nipple
1 pce	Plastic Case
Packing	5 set/CTN, 13.5 kgs / 14.5 kgs



EP-0981TK



Optional
EP-0983TK

EP-0982TK

EP-0984TK

17 pcs set 1/2" Mini Composite Impact Wrench Kit

1 pce	EP-0982T or EP-0984T
10 pcs	Air Socket (CR-V) 9,10,11,13,14,17,19,22,24,27 mm
1 pce	5" Extension Bar
1 pce	Oil Pot
1 pce	4 mm Hex Wrench
1 pce	Nipple
1 pce	Mini Oiler
1 pce	Plastic Case
Packing	5 set/CTN, 16 kgs / 17 kgs



EP-0982TK



Optional
EP-0984TK

EP-0982TK2

EP-0984TK2

9 pcs set 1/2" Mini Composite Impact Wrench Kit

1 pce	EP-0982T or EP-0984T
3 pcs	Thin Wall Impact Socket 17,19,21 mm (Chrome-Molybdenum)
1 pce	Oil Pot
1 pce	4 mm Hex Wrench
1 pce	Nipple
1 pce	Mini Oiler
1 pce	Plastic Case
Packing	5 set/CTN, 16 kgs / 17 kgs



EP-0982TK2



Optional
EP-0984TK2

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907

Fax: +886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw

1/2" Composite Impact Wrench

Light weight and high torque, excellent for use in industrial applications

EP-1281P 1/2" New Pin Clutch

EP-1281P2 1/2" New Pin Clutch 2" Anvil

Model	EP-1281P
Square Drive	1/2"
Bolt Capacity	5/8" (16 mm)
Max Torque	900FT-LB (124KG-M, 1200N-M)
Free Speed	10000 RPM
Air Consumption	5.4 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	208 mm (2"): 246 mm
Net Weight	2.06 kg (2"): 2.16 kg
Air Hose	10 mm
Packing	10pcs/CTN, 20.6 kgs / 21.6 kgs (2") 10pcs/CTN, 21.6 kgs / 22.6 kgs



EP-1281P2

- * Handle Exhaust
- * Forward: 3 speed
Reverse: 2 speed



EP-1281P

EP-1281T 1/2" Twin Hammer

EP-1281T2 1/2" Twin Hammer 2" Anvil

Model	EP-1281T
Square Drive	1/2"
Bolt Capacity	5/8" (16 mm)
Max Torque	1000FT-LB (138KG-M, 1356N-M)
Free Speed	10000 RPM
Air Consumption	5.4 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	193 mm (2"): 245 mm
Net Weight	2.02 kg (2"): 2.12 kg
Air Hose	10 mm
Packing	10pcs/CTN, 20.2 kgs / 21.2 kgs (2") 10pcs/CTN, 21.2 kgs / 22.2 kgs



EP-1281T2

- * Handle Exhaust
- * Forward: 3 speed
Reverse: 2 speed



EP-1281T

EP-1282T 1/2" Twin Hammer

EP-1282T2 1/2" Twin Hammer 2" Anvil

Model	EP-1282T
Square Drive	1/2"
Bolt Capacity	5/8" (16 mm)
Max Torque	1000FT-LB (138KG-M, 1356N-M)
Free Speed	10000 RPM
Air Consumption	5.4 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	192 mm
Net Weight	2.05 kg
Air Hose	10 mm
Packing	10pcs/CTN, 20.5 kgs / 21.5 kgs (2") 10pcs/CTN, 21.5 kgs / 22.5 kgs



EP-1282T2



EP-1282T

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907 Fax: +886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw

1/2" Composite Impact Wrench

Light weight and high torque, excellent for use in industrial applications

EP-1281PK

EP-1281TK

EP-1282TK

17 pcs set 1/2" Composite Impact Wrench Kit

1 pce	EP-1281P or EP-1281T or EP-1282T
10 pcs	Air Socket (Chrome-Molybdenum) 9,10,11,13,14,17,19,22,24,27 mm
1 pce	5" Extension Bar
1 pce	Oil Pot
1 pce	4 mm Hex Wrench
1 pce	Nipple
1 pce	Mini Oiler
1 pce	Plastic Case
Packing	5 set/CTN, 20 kgs / 21 kgs



EP-1281TK



**Optional
EP-1281PK**



**Optional
EP-1282TK**

EP-1281PK2

EP-1281TK2

EP-1282TK2

12 pcs set 1/2" Composite Impact Wrench Kit

1 pce	EP-1281P or EP-1281T or EP-1282T
6 pcs	Air Deep Socket (Chrome-Molybdenum) 17, 19, 21 mm with Plastic Sleeve 22, 23, 24 mm
1 pce	Oil Pot
1 pce	4 mm Hex Wrench
1 pce	Nipple
1 pce	Mini Oiler
1 pce	Plastic Case
Packing	5 set/CTN, 21.5 kgs / 22.5 kgs



EP-1281TK2



**Optional
EP-1281PK**



**Optional
EP-1282TK**

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel:+886-4-25155907 Fax:+886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw

3/4" Composite Impact Wrench

Light weight and high torque, excellent for use in industrial applications

EP-1930T 3/4" Mini Twin Hammer

EP-1930T6 3/4" Mini Twin Hammer 6" Anvil

Model	EP-1930T
Square Drive	3/4"
Bolt Capacity	1" (26 mm)
Max Torque	1000FT-LB (138KG-M, 1356N-M)
Free Speed	9000 RPM
Air Consumption	5.4 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	200 mm (6"): 353 mm
Net Weight	2.2 kg (6"): 2.64 kg
Air Hose	10 mm
Packing	10pcs/CTN, 22 kgs / 23 kgs (6") 8pcs/CTN, 21 kgs / 22 kgs



EP-1932T 3/4" Mini Twin Hammer

EP-1932T6 3/4" Mini Twin Hammer 6" Anvil

Model	EP-1932T
Square Drive	3/4"
Bolt Capacity	1" (26 mm)
Max Torque	1000FT-LB (138KG-M, 1356N-M)
Free Speed	9000 RPM
Air Consumption	5.4 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	204 mm (6"): 357 mm
Net Weight	2.22 kg (6"): 2.64 kg
Air Hose	10 mm
Packing	10pcs/CTN, 22 kgs / 23 kgs (6") 8pcs/CTN, 21 kgs / 22 kgs



Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907 Fax: +886-4-25155908

E-mail: sales@europac.com.tw <http://www.europac.com.tw>

3/4" Composite Impact Wrench

Light weight and high torque, excellent for use in industrial applications

EP-1982T 3/4" Twin Hammer

EP-1982T6 3/4" Twin Hammer 6" Anvil

Model	EP-1982T
Square Drive	3/4"
Bolt Capacity	1-1/8" (28 mm)
Max Torque	1200FT-LB (165KG-M, 1630N-M)
Free Speed	5500 RPM
Air Consumption	7 CFM
Air Inlet	3/8"
Air Pressure	90 PSI
Overall Length	221 mm (6"): 370 mm
Net Weight	3.6 kg (6"): 4.2 kg
Air Hose	13 mm
Packing	6pcs/CTN, 21.6 kgs / 22.6 kgs (6") 4cs/CTN, 16.8 kgs / 17.8 kgs



- * Handle Exhaust
- * Forward: 3 speed
- Reverse: 3 speed

EP-1982TK

14 pcs set 3/4" Impact Wrench Kit

1 pce	EP-1982T
8 pcs	Air Socket (CR-MO) 26,27,29,30,32,35,36,38 mm
1 pce	Oil Pot
1 pce	4 mm Hex Wrench
1 pce	5 mm Hex Wrench
1 pce	Nipple
1 pce	Plastic Case
Packing	3 set/CTN, 21.5 kgs / 22.5 kgs



Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel:+886-4-25155907 Fax:+886-4-25155908

E-mail: sales@europac.com.tw

<http://www.europac.com.tw>

1" Composite Impact Wrench

Light weight and high torque, excellent for use in industrial applications

EP-2581T 1" Twin Hammer

EP-2581T6 1" Twin Hammer 6" Anvil

Light Weight 5.1 KGS

High Torque 1500 FT-LB

Specifications:

Model	EP-2581T
Square Drive	1"
Bolt Capacity	1-5/8" (41 mm)
Max Torque	1500FT-LB (207KG-M, 2034N-M)
Free Speed	5300 RPM
Air Consumption	7 CFM
Air Inlet	3/8"
Air Pressure	90 PSI
Overall Length	256 mm (6"): 395 mm
Net Weight	5.1 kg (6"): 5.83 kg
Air Hose	13 mm
Packing	5pcs/CTN, 25.5 kgs / 26.5 kgs (6") 4cs/CTN, 24 kgs / 25 kgs



- * Handle Exhaust
- * Forward: 3 speed
- Reverse: 3 speed



*Changeable support handle direction for improved comfort at workplace



Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907 Fax: +886-4-25155908

E-mail: sales@europac.com.tw

<http://www.europac.com.tw>

1" Composite Impact Wrench

Light weight and high torque, excellent for use in industrial applications

EP-2583T6 1" Twin Hammer 6" Anvil
EP-2583T 1" Twin Hammer 2" Anvil

Light Weight 8 KGS
High Torque 2000 FT-LB

Air Exhaust
 Forward: 3 Speeds
 Reverse: 3 Speeds

- Durable Hammer Housing.
- Inside or Outside Trigger with 2-Speed Control.
- Two-Way Changeable Air Inlet Direction for Comfortable Workplace.
- Humanized Special Changeable Support Handle for Right-Hander and Left-Hander.

Model	EP-2583T6
Square Drive	1"
Bolt Capacity	1-3/4" (45 mm)
Max Torque	2000FT-LB (290KG-M, 2800N-M)
Working Torque	1800-2000 FT-LB (2400-2700 N-M)
Free Speed	4800 RPM
Air Consumption	9 CFM
Sound Pressure Level	93.6 dB(A)
Sound Power Level	104.6 dB(A)
Vibration Level	5 m/s ²
Air Inlet	1/2"
Air Pressure	90 PSI
Overall Length	550 mm (2"): 420 mm
Net Weight	8 kg (2"): 7.2 kg
Air Hose	13 mm
Packing	1pce/CTN, 8 kgs / 10 kgs (2") 1pce/CTN, 7.2 kgs / 9.2 kgs



EP-2583T6



EP-2583T



Forward: 3 Speeds
 Reverse: 3 Speeds



Inside or Outside Trigger
 with 2 Speed Control



Changeable Air Inlet
 Direction



For Right-Hander
 and Left-Hander



Air Exhaust

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907

Fax: +886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw

1/2" , 3/4" Composite Impact Wrench

Light weight and high torque, excellent for use in semi-professional applications

EP-PW1281T 1/2" Twin Hammer

- Handle Exhaust
- Forward: 3 Speeds Reverse: 1 Speed

Model	EP-PW1281T
Square Drive	1/2"
Bolt Capacity	5/8" (16 mm)
Max Torque	700FT-LB (949N-M)
Working Torque	580FT-LB (786N-M)
Free Speed	7500 RPM
Air Consumption	4.7 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	193 mm
Net Weight	2.04 kg
Air Hose	10 mm
Packing	10pcs/CTN, 21 kgs / 22 kgs



EP-PW1281T

EP-PW1982T 3/4" Twin Hammer

- Handle Exhaust
- Forward: 3 Speeds Reverse: 1 Speed

Model	EP-PW1982T
Square Drive	3/4"
Bolt Capacity	26 mm)
Max Torque	900FT-LB (1220N-M)
Working Torque	700FT-LB (950N-M)
Free Speed	4500 RPM
Air Consumption	14 CFM
Air Inlet	3/8"
Air Pressure	90 PSI
Overall Length	240 mm
Net Weight	3.9 kg
Air Hose	13 mm
Packing	5pcs/CTN, 21 kgs / 22 kgs



EP-PW1982T

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907 Fax: +886-4-25155908

E-mail: sales@europac.com.tw

<http://www.europac.com.tw>

1/2" Composite Impact Wrench

Light weight and high torque, excellent for use in semi-professional applications



EP-PW1283T

1/2" Twin Hammer

* Handle Exhaust

* Forward: 3 speed

Reverse: 1 speed



EP-PW1283T-A

1/2" Twin Hammer

* Handle Exhaust

* Forward: 3 speed

Reverse: 1 speed

Model	EP-PW1283T
Square Drive	1/2"
Bolt Capacity	5/8" (16 mm)
Max Torque	580FT-LB (787N-M)
Working Torque	500FT-LB (678N-M)
Free Speed	9000 RPM
Air Consumption	5.46 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	195 mm
Net Weight	1.95 kg
Air Hose	10 mm
Packing	10pcs/CTN, 20 kgs / 21 kgs

Model	EP-PW1283T-A
Square Drive	1/2"
Bolt Capacity	5/8" (16 mm)
Max Torque	580FT-LB (787N-M)
Working Torque	500FT-LB (678N-M)
Free Speed	9000 RPM
Air Consumption	5.46 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	195 mm
Net Weight	1.95 kg
Air Hose	10 mm
Packing	10pcs/CTN, 20 kgs / 21 kgs



EP-PW1284T

1/2" Twin Hammer

* Handle Exhaust

* Forward: 3 speed

Reverse: 1 speed



EP-PW1284T-A

1/2" Twin Hammer

* Handle Exhaust

* Forward: 3 speed

Reverse: 1 speed

Model	EP-PW1284T
Square Drive	1/2"
Bolt Capacity	5/8" (16 mm)
Max Torque	580FT-LB (787N-M)
Working Torque	500FT-LB (678N-M)
Free Speed	9000 RPM
Air Consumption	5.46 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	195 mm
Net Weight	1.95 kg
Air Hose	10 mm
Packing	10pcs/CTN, 20 kgs / 21 kgs

Model	EP-PW1284T-A
Square Drive	1/2"
Bolt Capacity	5/8" (16 mm)
Max Torque	580FT-LB (787N-M)
Working Torque	500FT-LB (678N-M)
Free Speed	9000 RPM
Air Consumption	5.46 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	195 mm
Net Weight	1.95 kg
Air Hose	10 mm
Packing	10pcs/CTN, 20 kgs / 21 kgs

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907 Fax: +886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw

1/2" Mini Impact Wrench

Light weight and high torque, excellent for use in industrial applications



EP-0907T Stubby

Stubby 1/2" Twin Hammer

*Short and small length for easy to get into narrow space.

*Handle Exhaust

*Forward: 3 speed

Reverse: 3 speed

Model	EP-0907T
Square Drive	1/2"
Bolt Capacity	14 mm
Max Torque	450FT-LB (62KG-M, 610N-M)
Free Speed	10000 RPM
Air Consumption	5.8 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	122 mm
Net Weight	1.56 kg
Air Hose	10 mm
Packing	10pcs/CTN, 16 kgs / 17 kgs



EP-0907TK
14 pcs set 1/2" Impact Wrench Kit



EP-0907TK2
17 pcs set 1/2" Impact Wrench Kit

EP-0907TK		EP-0907TK2	
1 pce	EP-0907T	1 pce	EP-0907T
9 pcs	Mini Socket (CR-V) 13,14,15,16,17,18,19,21,24 mm	9 pcs	Mini Socket (CR-V) 13,14,15,16,17,18,19,21,24 mm
		3 pcs	Thin Wall Impact Socket 17,19,21mm (Chrome-Molybdenum)
1 pce	75mm Extension Bar	1 pce	75mm Extension Bar
1 pce	Oil Pot	1 pce	Oil Pot
1 pce	Nipple	1 pce	Nipple
1 pce	Plastic Case	1 pce	Plastic Case
Packing	5 set/CTN, 15 kgs / 16 kgs	Packing	5 set/CTN, 18.5 kgs / 19.5 kgs

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907

Fax: +886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw

1" Impact Wrench



EP-2590T



EP-2590T8



Inside Trigger (Optional)



EP-2570T



EP-2570T8

EP-2590T8 1" Twin Hammer 8" Anvil

EP-2590T 1" Twin Hammer 2" Anvil

Forward: 3 Speeds

Reverse: 3 Speeds

Specifications:

Model	EP-2590T8
Square Drive	1"
Bolt Capacity	2" (50 mm)
Max Torque	2000FT-LB (277KG-M, 2712N-M)
Free Speed	3400 RPM
Air Consumption	8.2 CFM
Air Inlet	1/2"
Air Pressure	90 PSI
Overall Length	597 mm (2"): 432 mm
Net Weight	13.5 kg (2"): 11.7 kg
Air Hose	13 mm
Packing	1pce/CTN, 13.5 kgs / 14.5 kgs (2") 1pce/CTN, 11.7 kgs / 12.7 kgs

EP-2570T8 1" Twin Hammer 8" Anvil

EP-2570T 1" Twin Hammer 2" Anvil

Forward: 3 Speeds

Reverse: 3 Speeds

Specifications:

Model	EP-2570T8
Square Drive	1"
Bolt Capacity	2" (50 mm)
Max Torque	2500FT-LB (345KG-M, 3390N-M)
Free Speed	3000 RPM
Air Consumption	8.5 CFM
Air Inlet	1/2"
Air Pressure	90 PSI
Overall Length	622 mm (2"): 453 mm
Net Weight	14.6 kg (2"): 13.1 kg
Air Hose	13 mm
Packing	1pce/CTN, 14.6 kgs / 15.6 kgs (2") 1pce/CTN, 13.1 kgs / 14.1 kgs

Europac

EUROPAC INTERNATIONAL COMPANY

1F, No. 109, Zihchiang South Street, Fengyuan, Taichung 42051, TAIWAN

Tel: +886-4-25155907 Fax: +886-4-25155908

E-mail: sales@europac.com.tw

http://www.europac.com.tw